



ALUMINIUM CAMLOCKS


Recommended Use:

The RX Aluminium Camlocks are manufactured from a high quality aluminium alloy and feature 304 stainless steel pins, impact/wear resistant forged brass arms, plated steel finger rings and are heat treated to provide greater durability. They are made to strict tolerances to ensure a leak proof seal. RX Aluminium Camlocks have BSP Threads.

These Camlocks are most commonly used with general transfer of water and some Fuels (diesel).

Dust Caps and Dust Plugs are not to be used in pressure applications

Temperature Range: As a guide only -65°C to +120°C

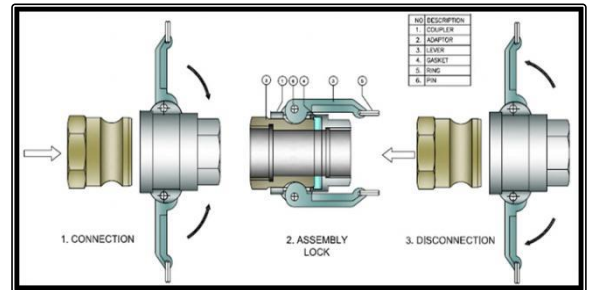

Rated Working Pressure @ 20°C :
15mm - 50mm 150psi, 65mm 125psi,
100mm 100psi & 150mm 75psi,

Type	15mm	20mm	25mm	32mm	40mm	50mm	65mm	80mm	100mm	150mm
A	15mm	20mm	25mm	32mm	40mm	50mm	65mm	80mm	100mm	150mm
B	15mm	20mm	25mm	32mm	40mm	50mm	65mm	80mm	100mm	150mm
C	15mm	20mm	25mm	32mm	40mm	50mm	65mm	80mm	100mm	150mm
D	15mm	20mm	25mm	32mm	40mm	50mm	65mm	80mm	100mm	150mm
E	15mm	20mm	25mm	32mm	40mm	50mm	65mm	80mm	100mm	150mm
F	15mm	20mm	25mm	32mm	40mm	50mm	65mm	80mm	100mm	150mm
DC	15mm	20mm	25mm	32mm	40mm	50mm	65mm	80mm	100mm	150mm
DP	15mm	20mm	25mm	32mm	40mm	50mm	65mm	80mm	100mm	150mm
AA						50mm		80mm	100mm	



A

B

C

D

E

F

DC

DP

SA